


DIMENSIONS

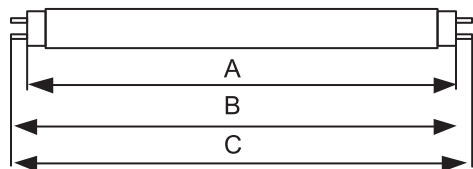

Ordering Abbreviation	A _{Max} Base face to Base face [inches]	B _{Min} /B _{Max} Base face to end of opposite base pin [inches]	C _{Min} /C _{Max} End of base pin to the end of the opposite pin end [inches]
F54T5/VITA-BRITE®/HO	45.23	45.42/45.51	45.67/45.79
F32T8/VITA-BRITE®	47.22	47.40/47.50	47.67/47.78

ORDERING GUIDE

91724


F 54 T5 /VITA-BRITE®/ HO

Tubular Electronic Bulb VITA-BRITE® = 5700 K High
Fluorescent Ballast Dimension Output
Lamp Wattage (8/8 inch)

91615

F 32 T8 /VITA-BRITE®/

Tubular Electronic Bulb VITA-BRITE® = 5700 K
Fluorescent Ballast Dimension
Lamp Wattage (8/8 inch)

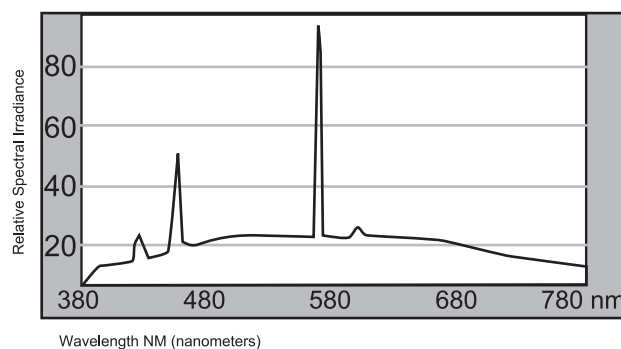

The lamps have medium bi-pin bases.
The lamps shall have a correlated color temperature of 5700 K.

ORDERING AND SPECIFICATION INFORMATION

CODE	DESCRIPTION	LENGTH	WATT	INITIAL LUMEN	MEAN LUMEN	HOURS	COLOR	CRI	BASE
91724	F54T5/VITA-BRITE®/HO	45.8	54	4800	4560	36,000	5700	91	MED BI PIN
91615	F32T8/VITA-BRITE®	48.0	32	2950	2800	36,000	5700	91	MED BI PIN