


VAPOR TIGHT FIXTURE

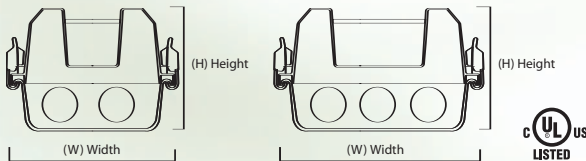

DIMENSIONS

CODE	(L) LENGTH	(W) WIDTH	(H) HEIGHT
57731	61.75	6.67	4.5
57733	50	10.39	4.5

The Superior Life® Vapor Tight Fixture is an energy efficient industrial fixture that features rugged and durable construction. The fixture incorporates a full metal housing channel inside a reinforced fiberglass housing with a high impact diffuser and positive cam latching.

Suitable for interior and exterior applications, this fixture can be surface or chain mounted. Custom designed for maximum performance in commercial, institutional and industrial environments where weathering, high temperature, humidity and dust or corrosive fumes are present.

FEATURES & BENEFITS

- Equipped with energy saving ballasts/complies with federal energy efficiency standards
- Reinforced fiberglass housing
- High impact acrylic material standard
- Gasketing formed to housing provides a seamless seal
- Water tight hubs standard at each end accepts .5" conduit
- Optional top only hub entry or combination top and end hub entry available
- Die formed galvanized steel mounting brackets with each fixture
- Baked enamel finish
- UL listed for wet locations

SUPERIOR LIFE® VAPOR TIGHT FIXTURE

CODE	LAMPS	VOLTS	CLIP QUANTITY
57731	F28 or F32	120-277V	12
57733	F28 or F32	120-277V	10



PREMIUM QUALITY LIGHTING
 1.800.323.8107 • FAX: 1.877.619.7053
www.pqlighting.com

©2010 PQL, Inc.