

**SAVE UP TO 70%
ENERGY WITH COMPARABLE
LIGHT OUTPUT**

CFL-PAR



Dimmable
Also Available




FEATURES & BENEFITS

- Available in 15W and 19W (PAR30) and 23W (PAR38)
- 60° Floodlight Reflector
- Wide Range of Operation Temperatures: 0°F - 120°F
- Optimal Light Output in Any Position
- Electronic Ballast with End-of-Life Protection*
- Use Indoor or Outdoor
- Suitable for Wet Applications
- 95% Lumen Maintenance

* End-of-Life Protection:

Our CFL-PARs have built in End-of-Life Protection Circuitry to protect the lamps from overheating at the end their life. CFLs without this technology can potentially overheat to the point where the plastics containing the ballast begin to melt causing health and fire hazards.

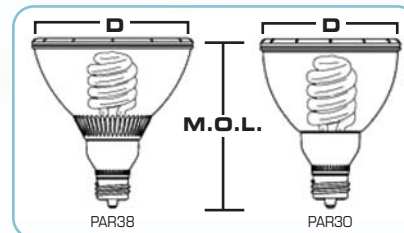

THREE COLOR OPTIONS:

WARM TONE 2850K	DAY-BRITE™ 4100K	SKY-BRITE® FULL SPECTRUM
---------------------------	----------------------------	------------------------------------

PART #	TYPE	WATTS	M.O.L.	(D) DIAMETER	COLOR	CRI	LUMENS	INCANDESCENT OR HALOGEN EQUIVALENT:
91674	PAR30	15	4.875	3.75	SKY-BRITE®	>82	750	60W
71673	PAR30	19	4.625	3.75	2850K	>82	855	75W
71672	PAR30	19	4.625	3.75	4100K	>82	855	75W
71674	PAR30	19	4.625	3.75	SKY-BRITE®	>82	855	75W
71675	PAR38	23	5.000	4.75	2850K	>82	1200	90W
91675	PAR38	23	5.000	4.75	3000K	>82	1350	90W
71677	PAR38	23	5.000	4.75	4100K	>82	1200	90W
71676	PAR38	23	5.000	4.75	SKY-BRITE®	>82	1200	90W
91676	PAR38	23	5.000	4.75	SKY-BRITE®	>82	1350	90W
<i>Dimmable</i>								
71715	PAR30	19	4.625	3.75	2850K	>82	775	75W
71721	PAR38	23	5.00	4.75	2850K	>82	1030	90W



PREMIUM QUALITY LIGHTING
1.800.323.8107 • FAX: 1.877.619.7053
www.pqlighting.com

©2010 PQL, Inc.